





RENTAL INDOOR LED DISPLAY



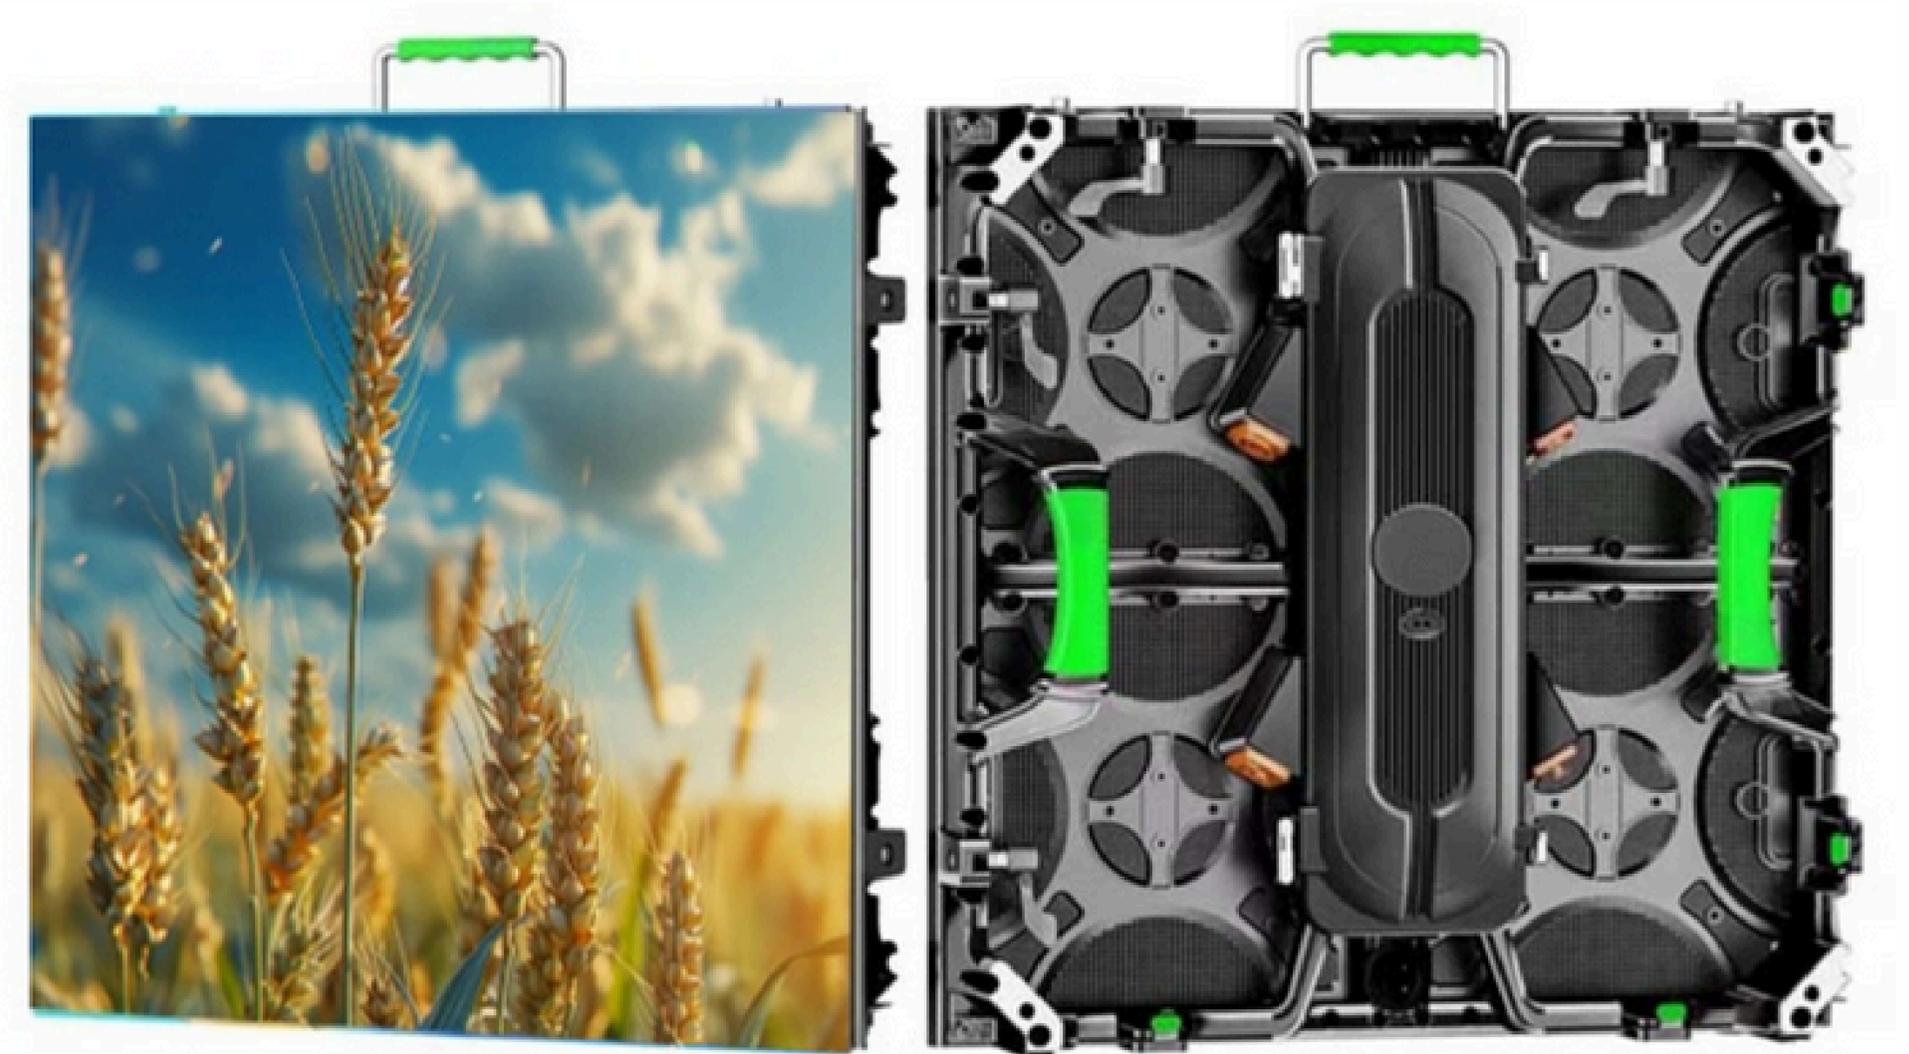

RENTAL 500X500MM INDOOR LED DISPLAY

- Pixel pitch : P2.6mm
- Panel size : 500x500x70mm
- Module size : 250x250mm
- Brightness : 1000 nits/m
- Refresh rate : 3840 Hz
- Panel weight : 7 kg/pc
- Input voltage : AC100-240V 50/60hz
- IP rating : IP45
- Certificate : CE Rohs BIS FCC IS09001
- Warranty : 24 months full warranty+12 month free

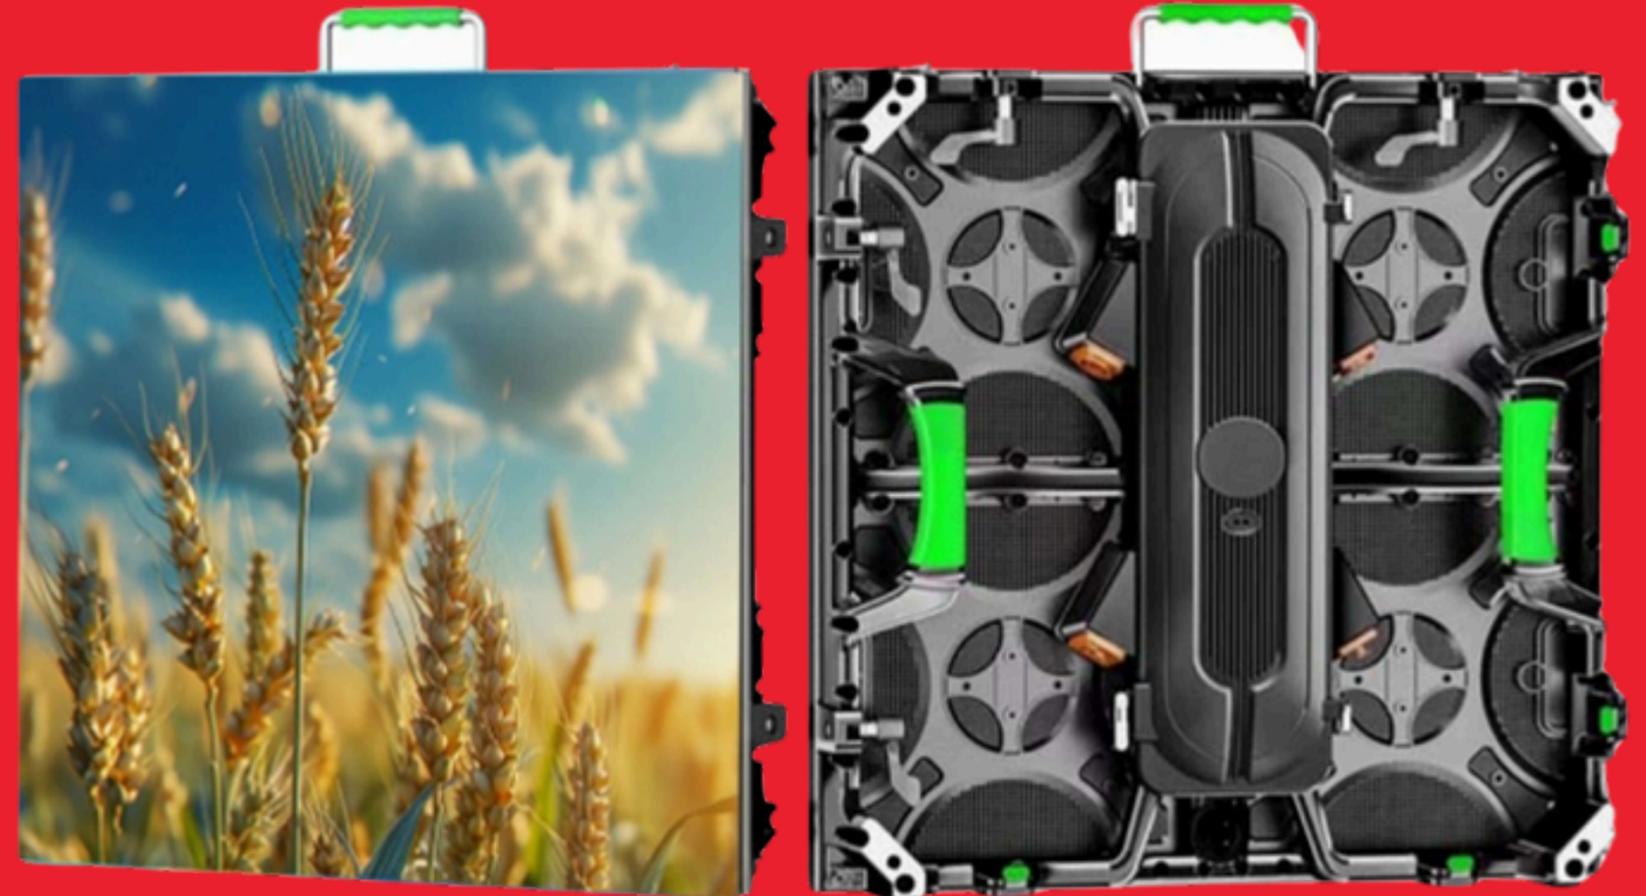

OUTDOOR/INDOOR RENTAL LED SCREEN

500mmx1000mm or 500x500mm Die-casting
Aluminum Cabinet

ATMOZ
LED

www.atmozled.com



IP65 PROTECTION GRADE

IP 65 waterproof and dust proof, suitable for both indoor and outdoor use


ATMOZ
LED

www.atmozled.com

IP65 WATERPROOF



SIZE CUSTOMIZATION

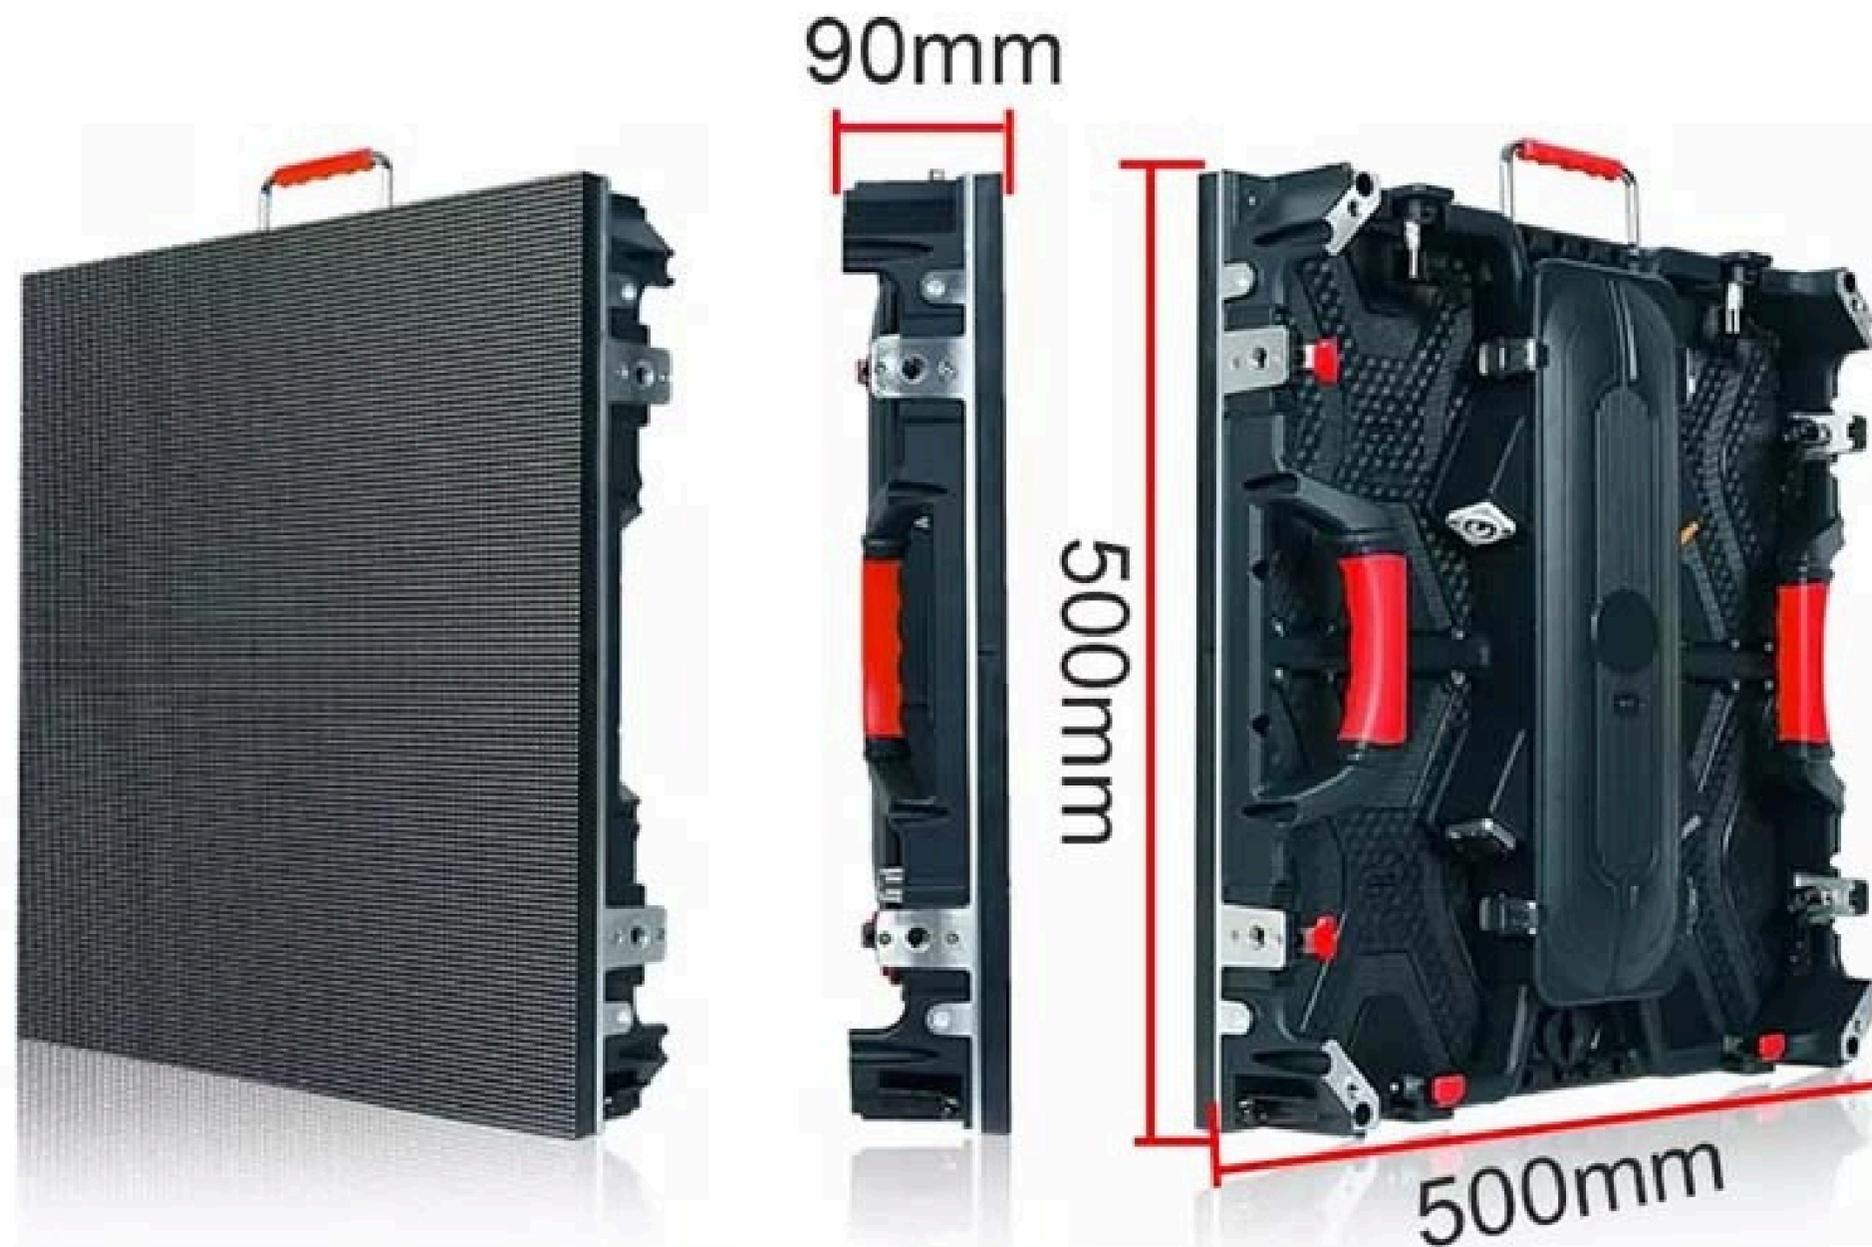

500x500x90mm

LIGHTER AND THINNER

ATMOZ
LED

www.atmozled.com



500x500/7.5 kg



500x1000/16 kg

CURVED SURFACE INSTALLATION

Curved led screen can be achieved by curved lock, it can make both inner and outer arc, 0-15 degrees and -15-0 degrees.



Adjustable: $-15^{\circ}/+15^{\circ}$



FRONT AND REAR MAINTENANCE

Maintenance channel free, quick to replace
module and power






1920-3840Hz



Seamless Splicing



Die cast aluminum

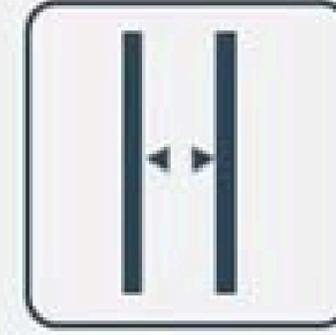

Ultra-thin



Energy conservation



IP65 waterproof



7.5/16kg



Front/Rear maintenance

HIGH GRAY SCALE

Rich colors and exquisite picture details



High Gray Scale

Less detail loss in dark parts




Low Gray Scale

POPULAR APPLICATIONS



CORNER PROTECTOR FROM HIT

Protector around four-corner of cabinet to better protect cabinet from led damage

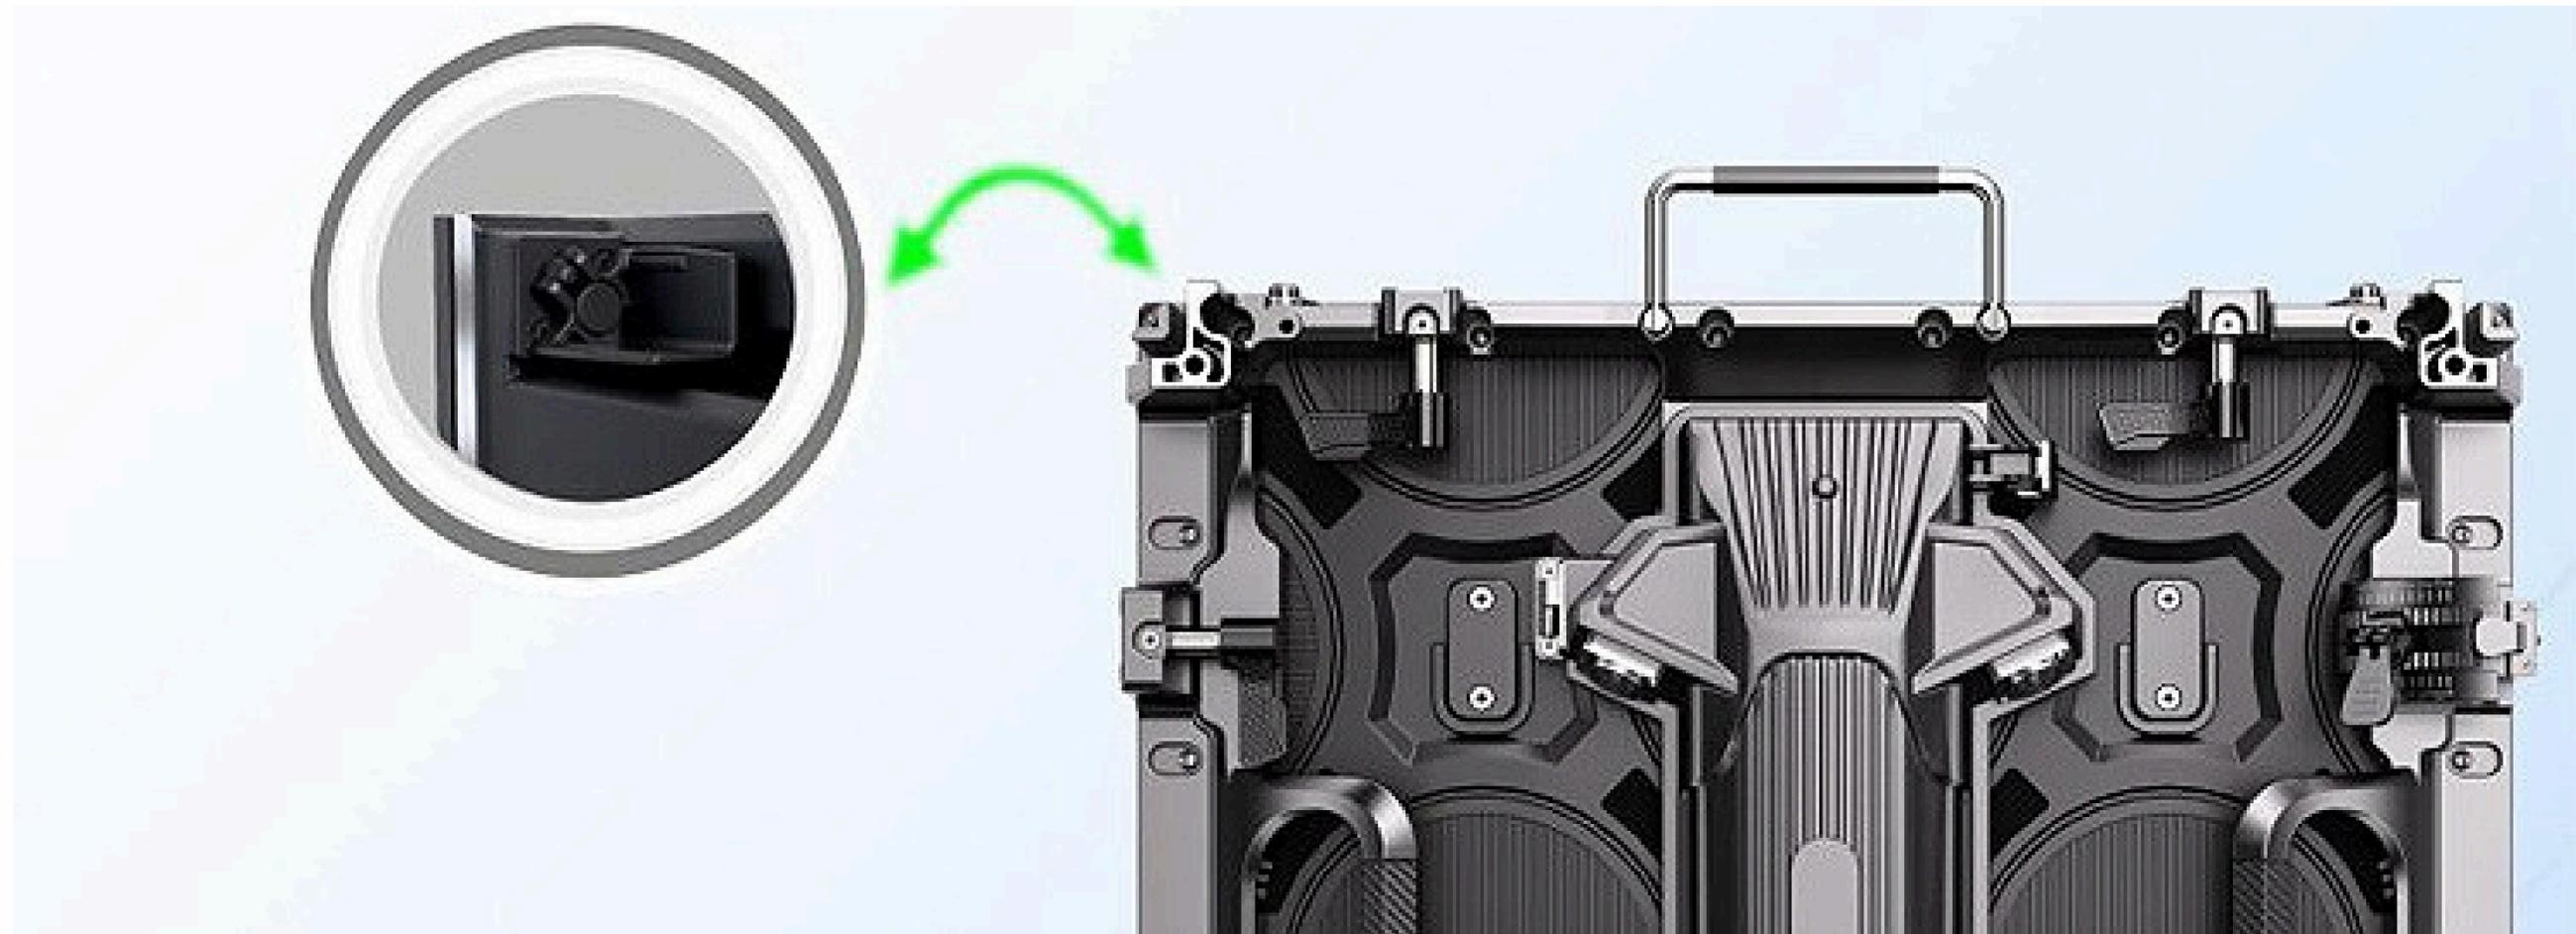

CONCAVE AND CONVEX INSTALLATIONS

Curve cabinet unique design

Display extraordinary LED effect and visual perception



Specification

VCE models

| | | | | |
|-------------------------|---|------------|---------------|---------------|
| Pixel pitch | 2.6mm | 2.97mm | 3.9mm outdoor | 4.8mm outdoor |
| LED configuration | SMD2020 | SMD2020 | SMD1921 | SMD1921 |
| Brightness | 1000 nits | 1000 nits | 5000 nits | 5000nits |
| Scan mode | 1/16 | 1/28 | 1/16 | 1/13 |
| Refresh rate | 1920/3840/7680Hz | | | |
| Processing | 14/16 bits | 14/16 bits | 14/16 bits | 14/16 bits |
| Module size | 250mm x 250mm x 17mm (W x H x D) | | | |
| Panel size | 500mm x 500mm x 69mm (W x H x D) | | | |
| Panel weight | 6.8kg/pcs | | | |
| Input voltage | AC100~240V 50/60 HZ | | | |
| Power consumption (Avg) | 160W/sqm | 160W/sqm | 180W/sqm | 180W/sqm |
| Power consumption (Max) | 600W/sqm | 600W/sqm | 640W/sqm | 640W/sqm |
| Working temperature | -20°C~60°C | | | |
| IP rating | IP42/IP31 | IP42/IP31 | IP65/IP54 | IP65/IP54 |
| Life span | 100,000 hrs | | | |
| Warranty | 24 months full warranty + 12 month free maintenance | | | |