




KST SERIES RENTAL LED DISPLAY





KST SERIES RENTAL LED DISPLAY


- P1.56 P1.95 P2.5 P2.604 P2.976 P3.91
- Cabinet size: 500*500mm/500*1000mm
- P2.976 P3.9 P3.91 P4.81 P5.95
- 24 months full warranty + 12 months free maintenance
- Comprehensive supply
- Power Box easy removable from front and back
- Handle Lock up and down cabinets make more
- Strength for hanging system
- Curve Lock Inner +5 degrees /Outer -5 degrees
- Complete Front maintenance design

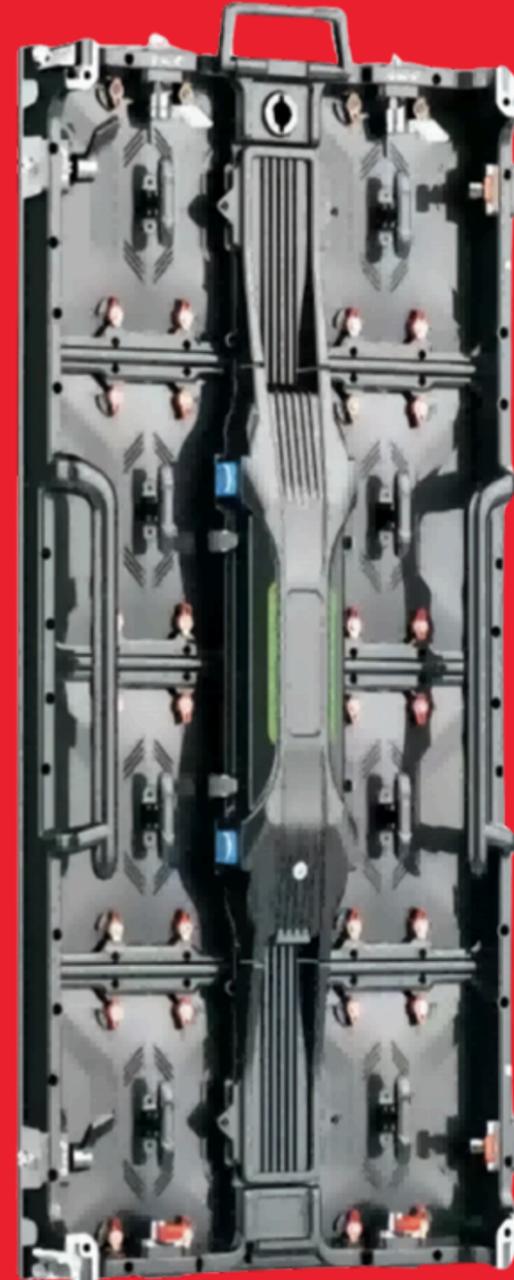


ATMOZ 500K SERIES

Indoor/Outdoor Application

Multifunction Stage Rental LED Display

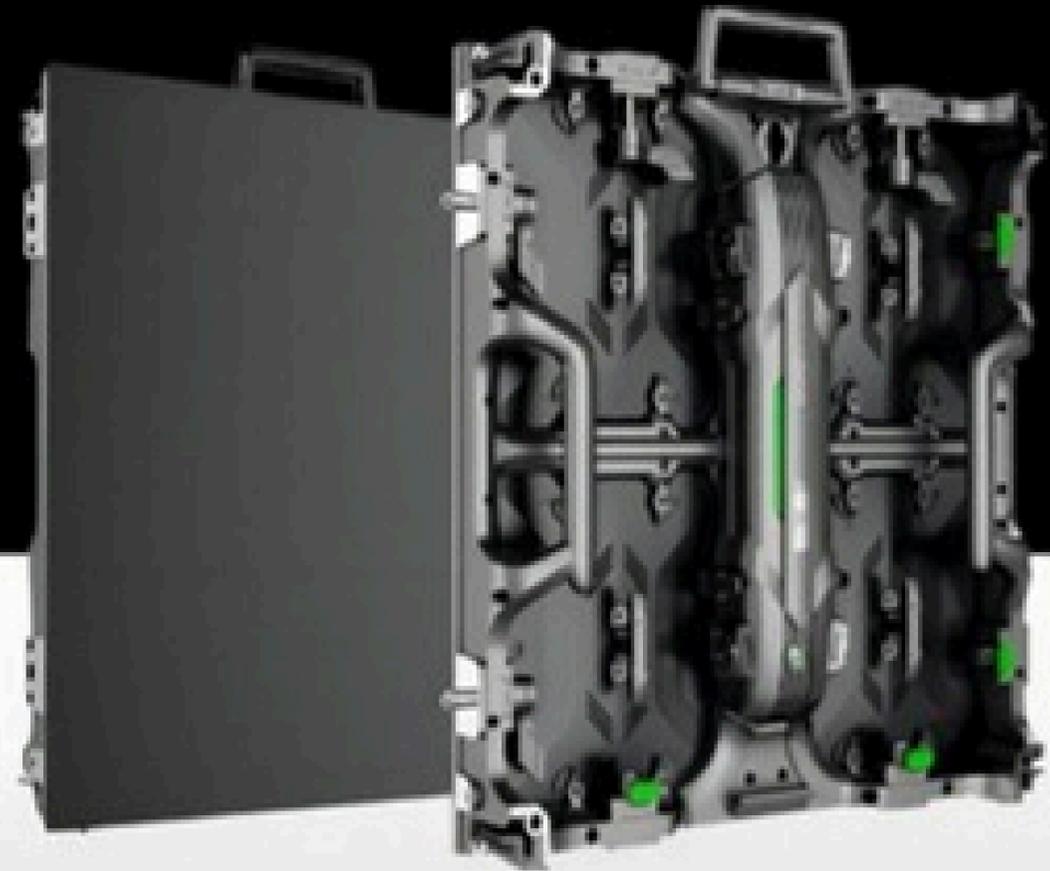

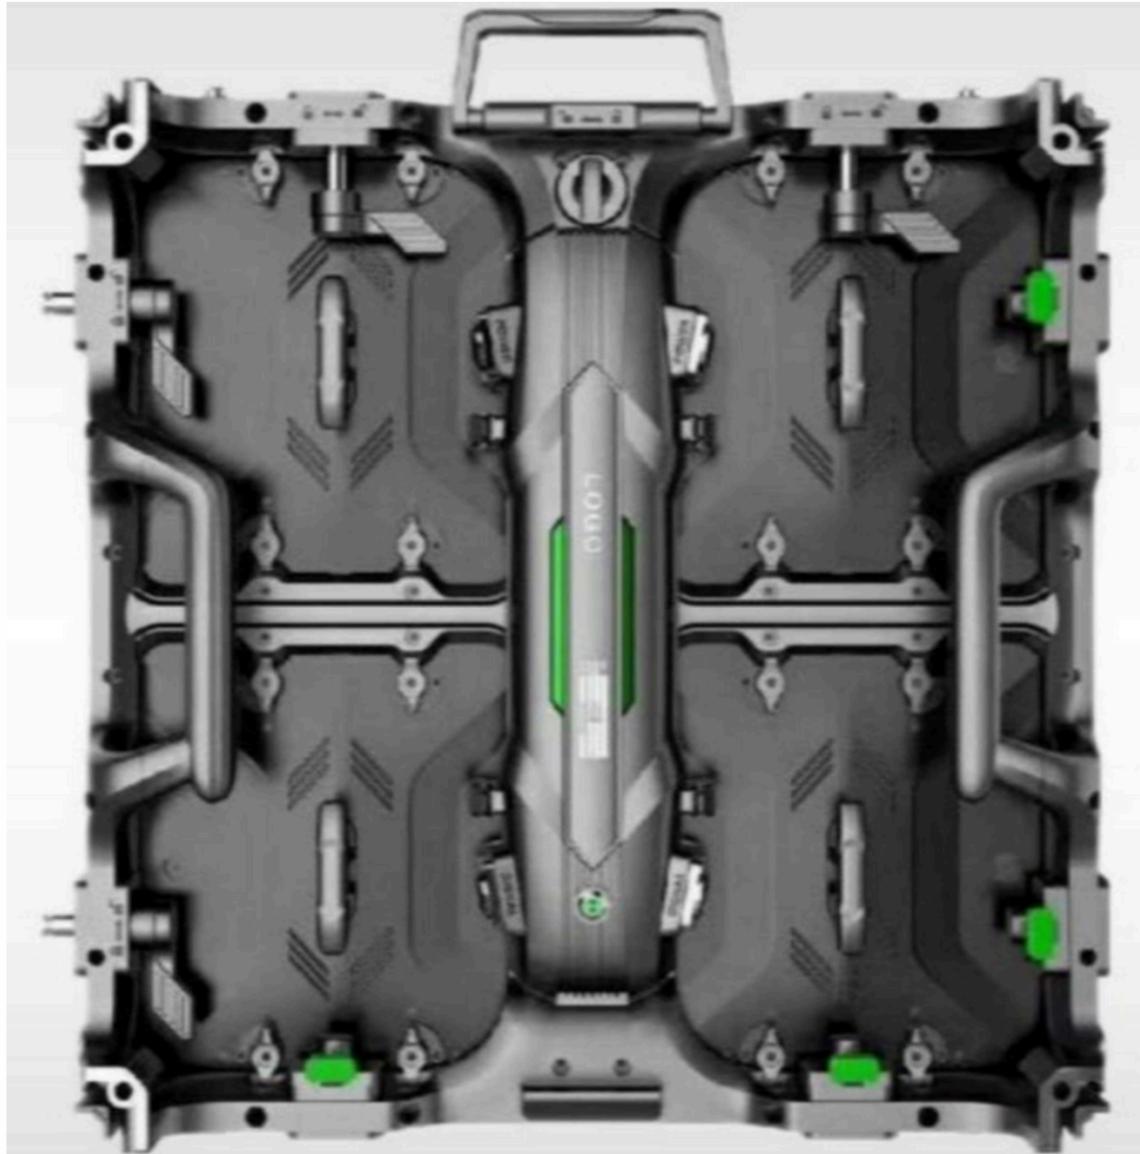

→ | ←

Thin And Light

■ + ■

Multi Occasion Use

🔧


Easy installation

🔧


Front& Back maintenance



- Side lock design, quick installation
- Can be hoisted, base mounted, fixed installation
- Front and rear maintenance, easy to disassemble and assemble
- Screen size, arbitrarily assembled


500mmx500mmx81.66mm

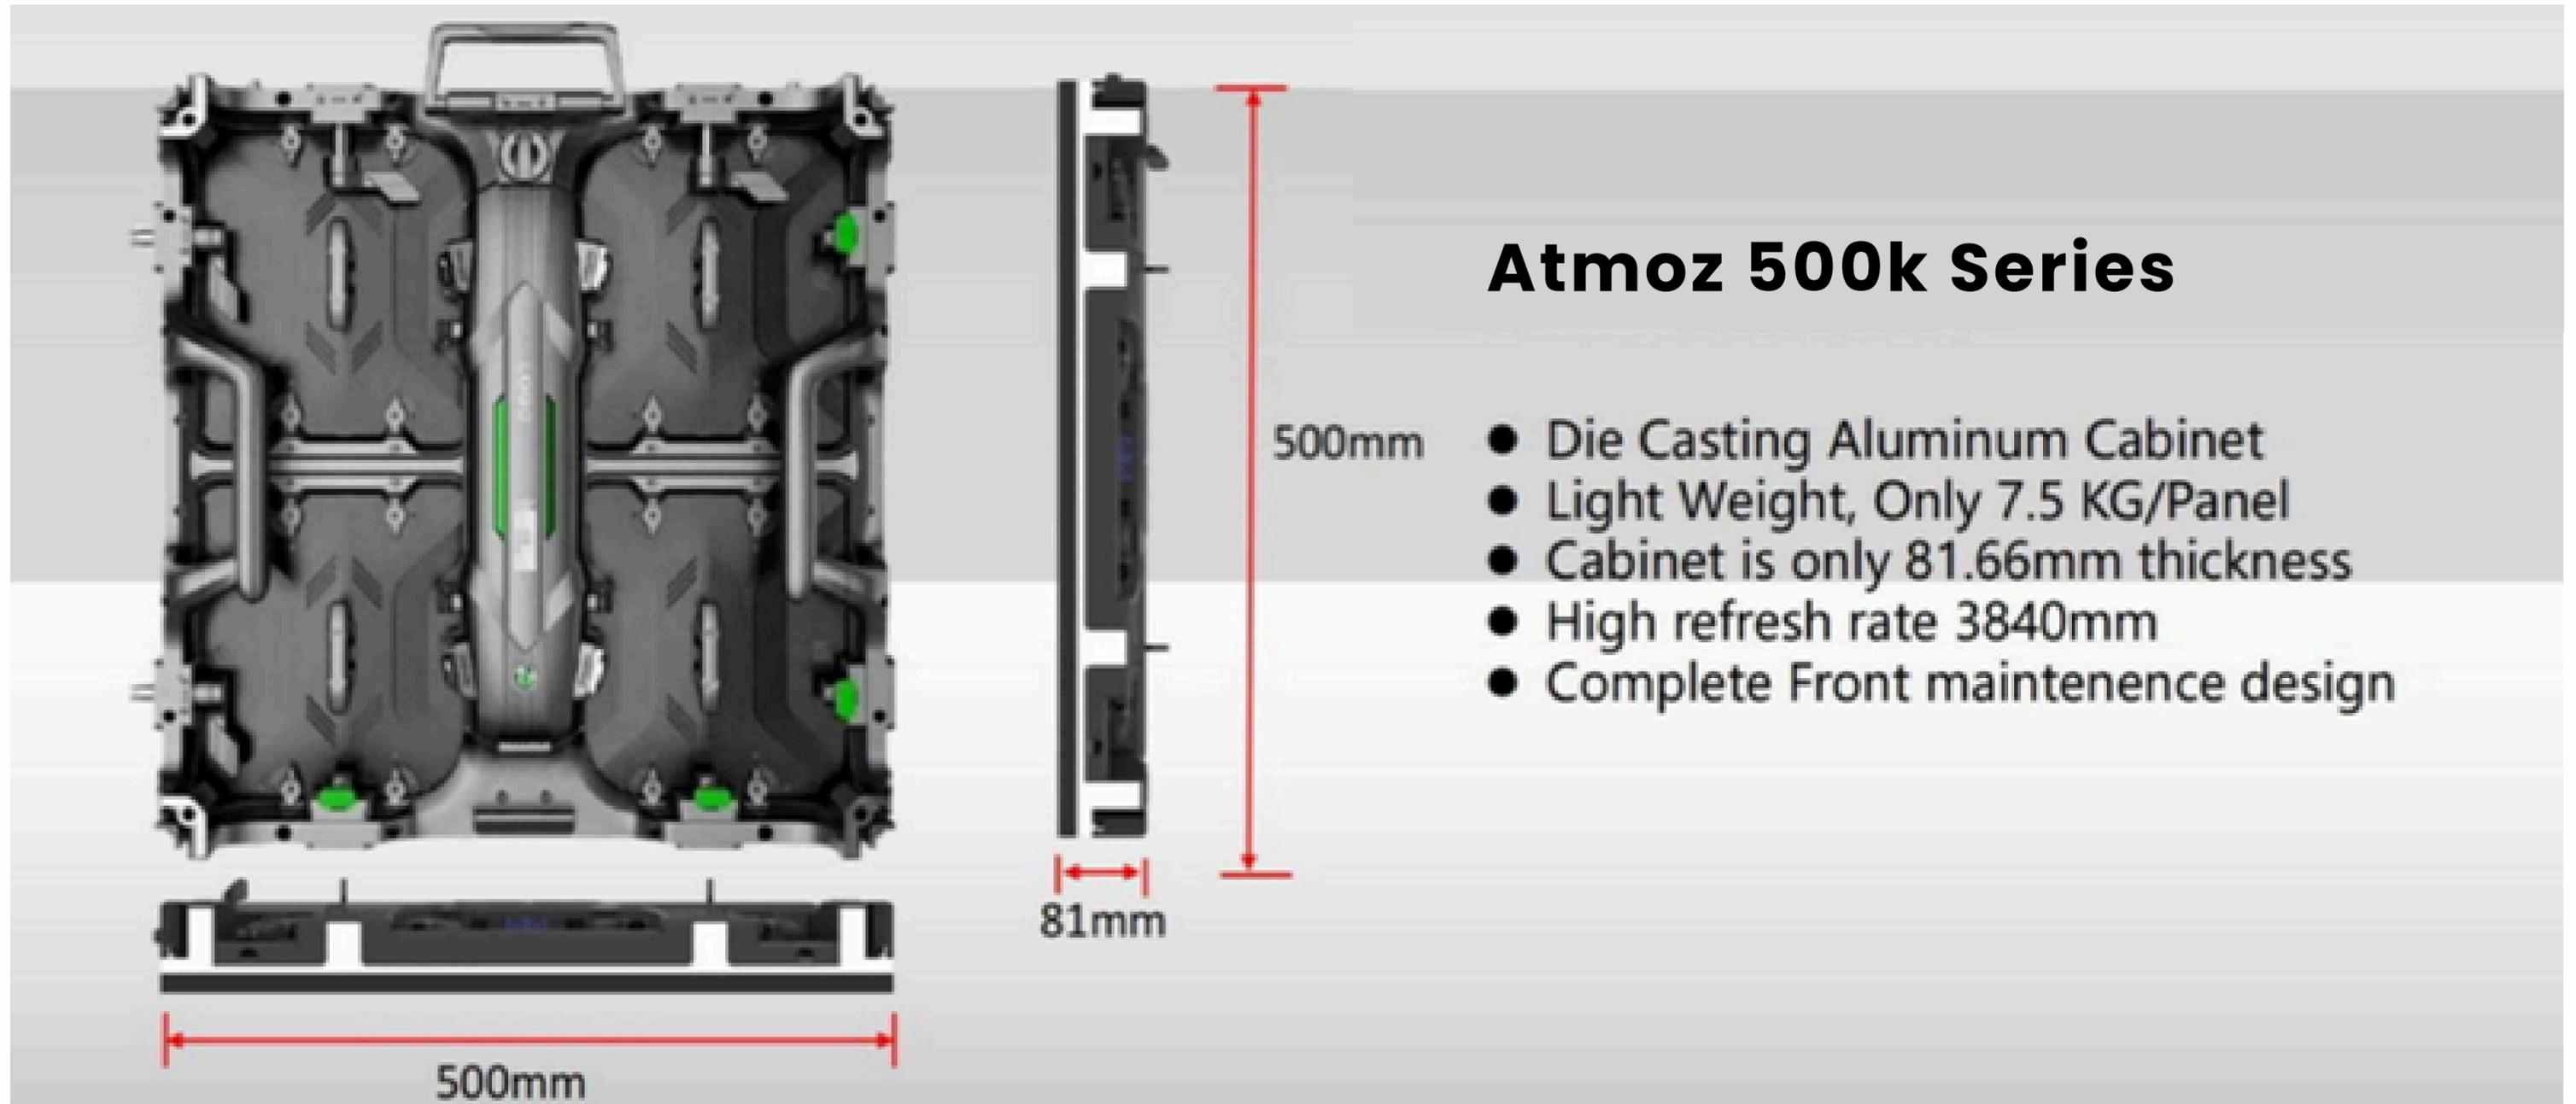


PRODUCT DETAILS

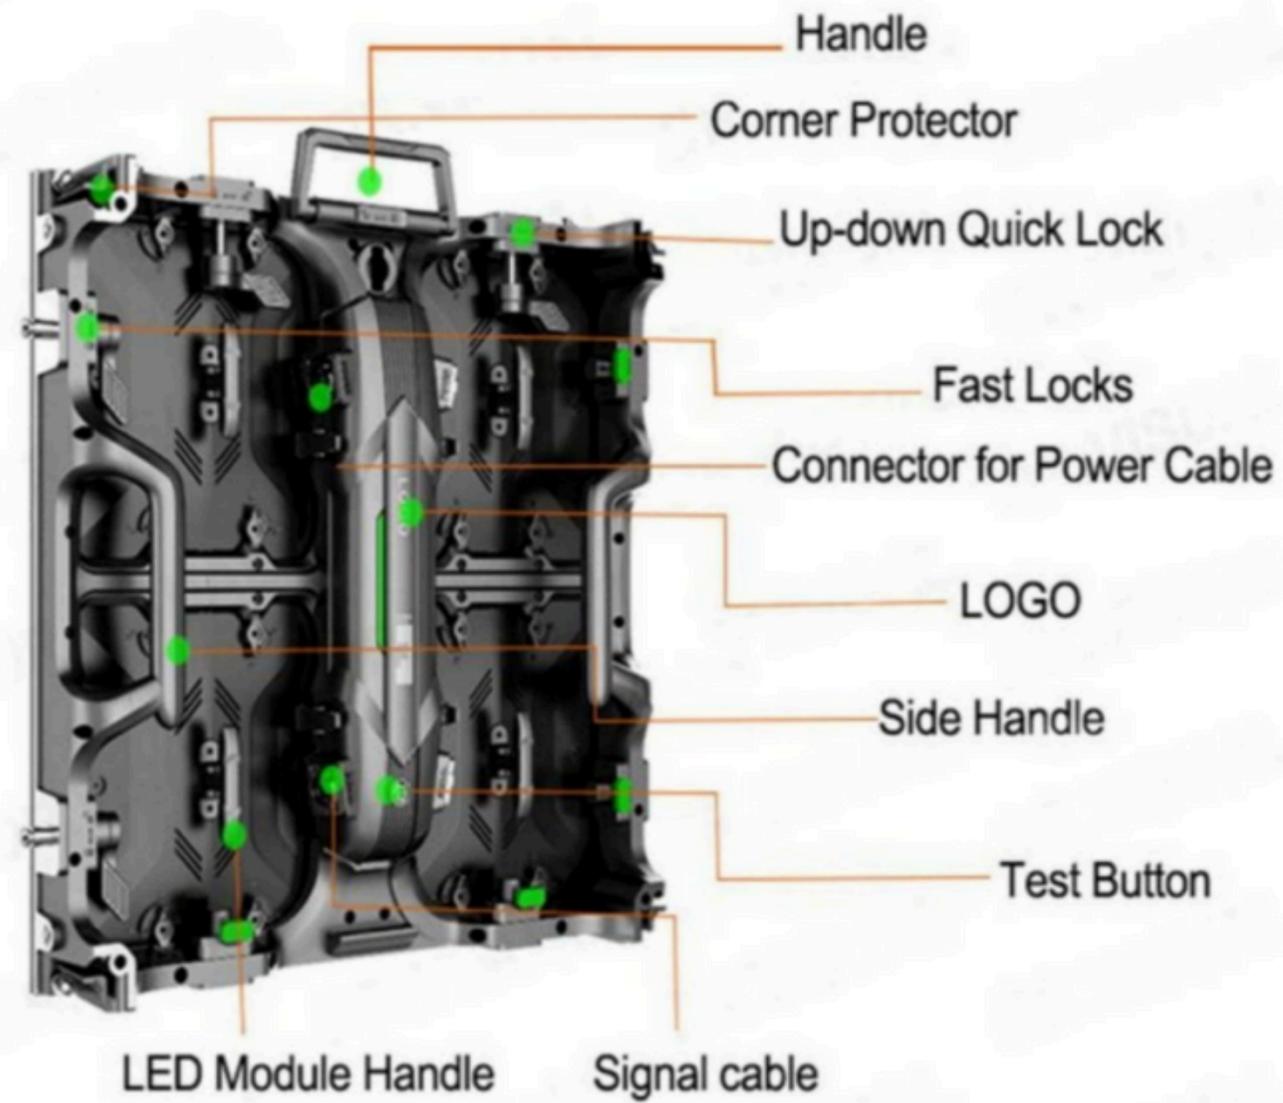


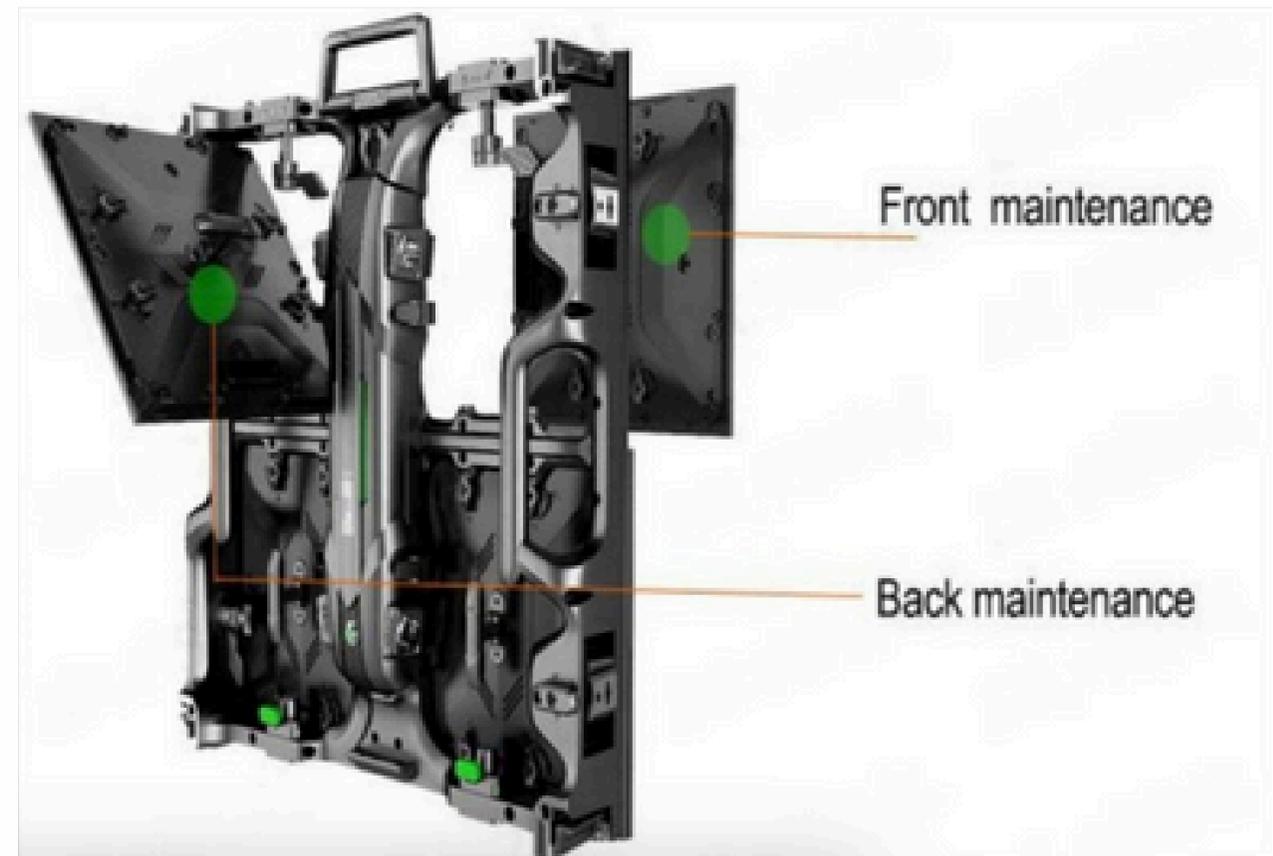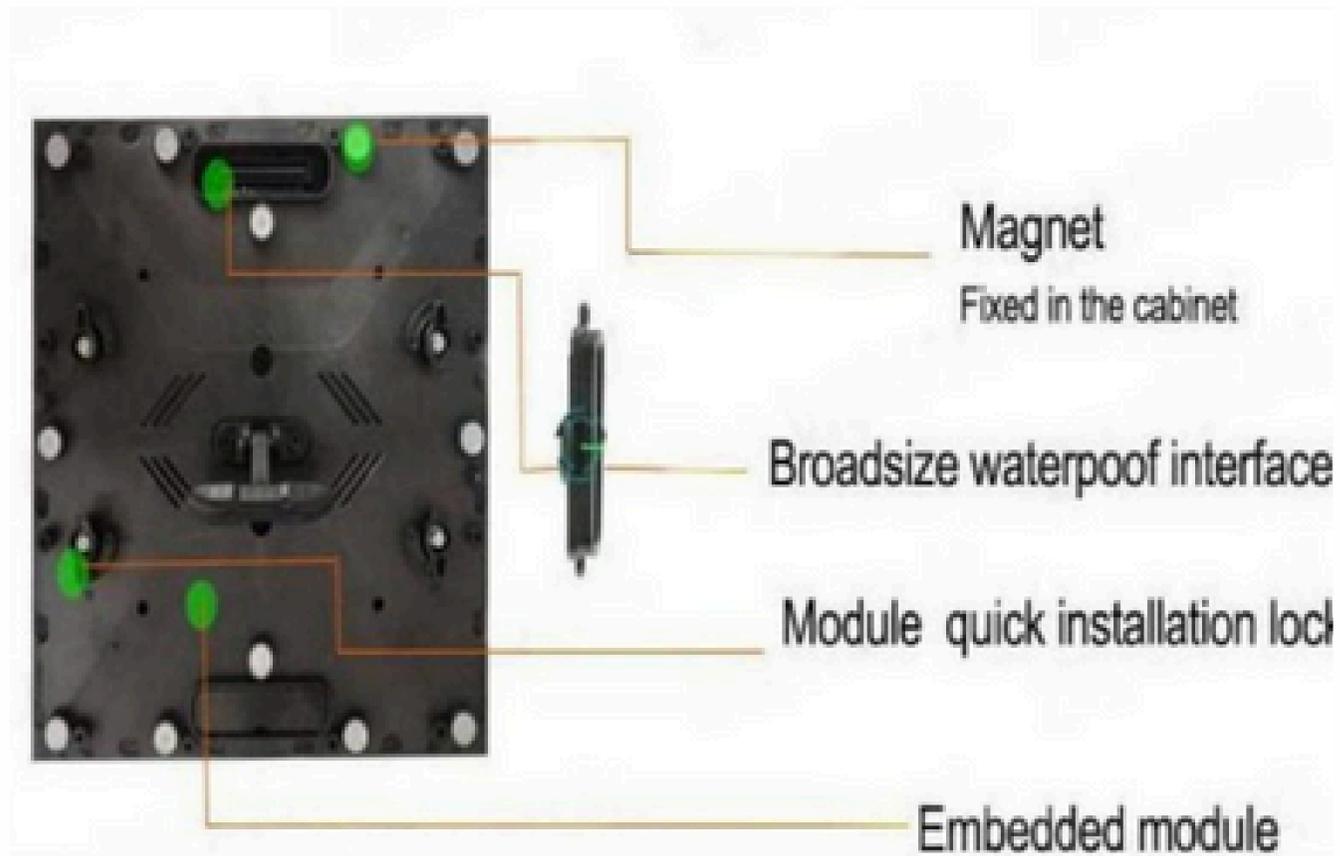

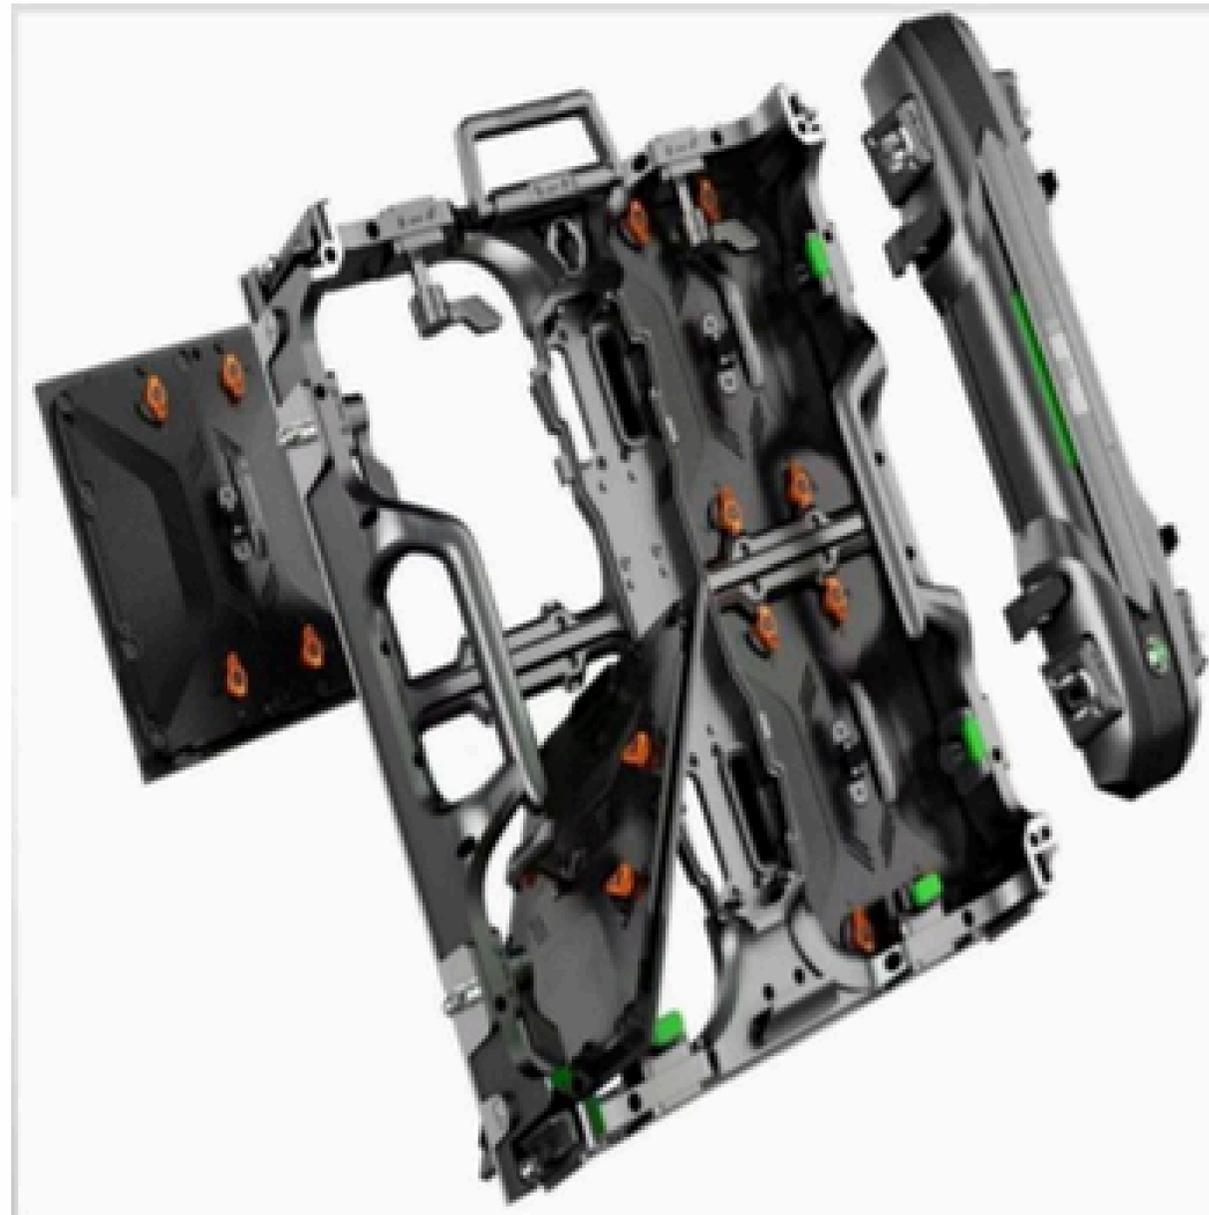


Handle Lock up and down cabinets
make more strength hanging system

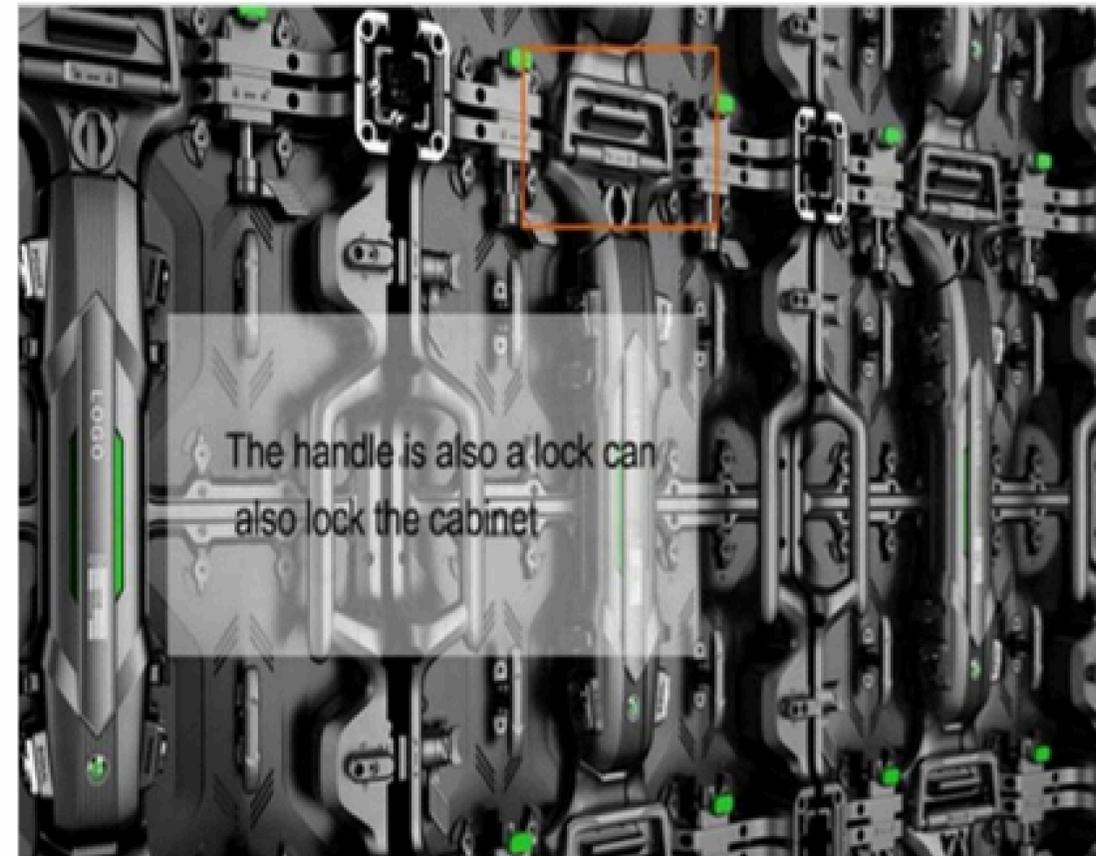


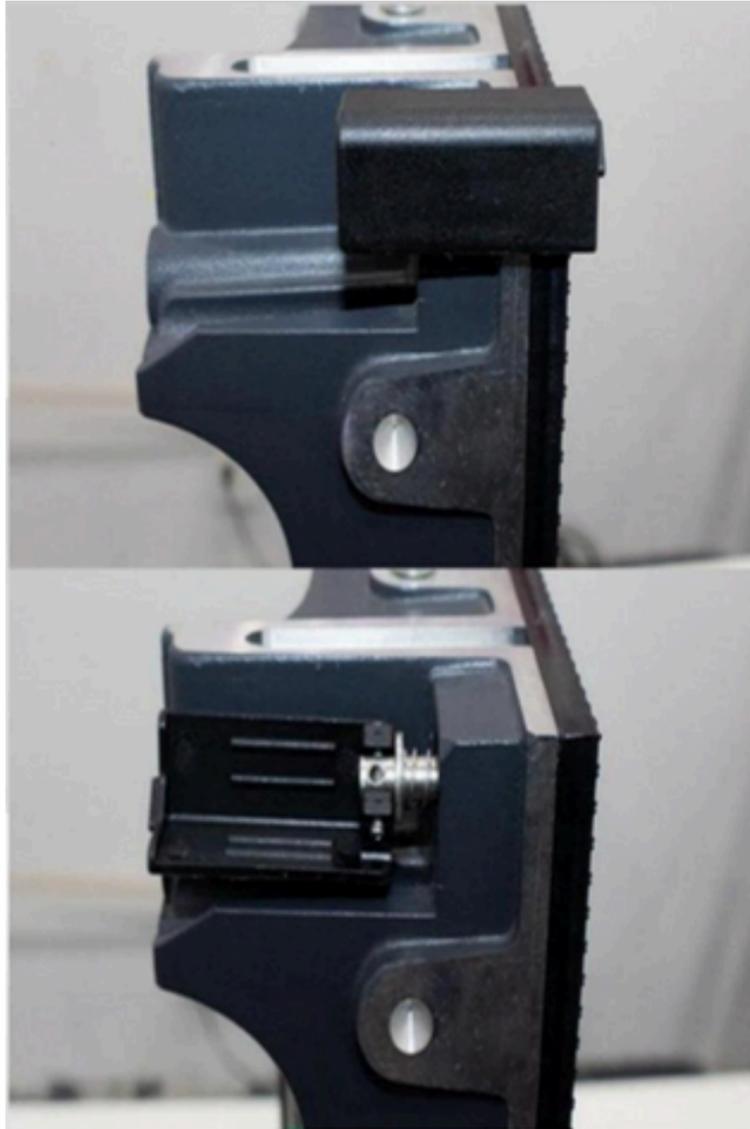


Handle Lock up and down cabinets
make more strength hanging system

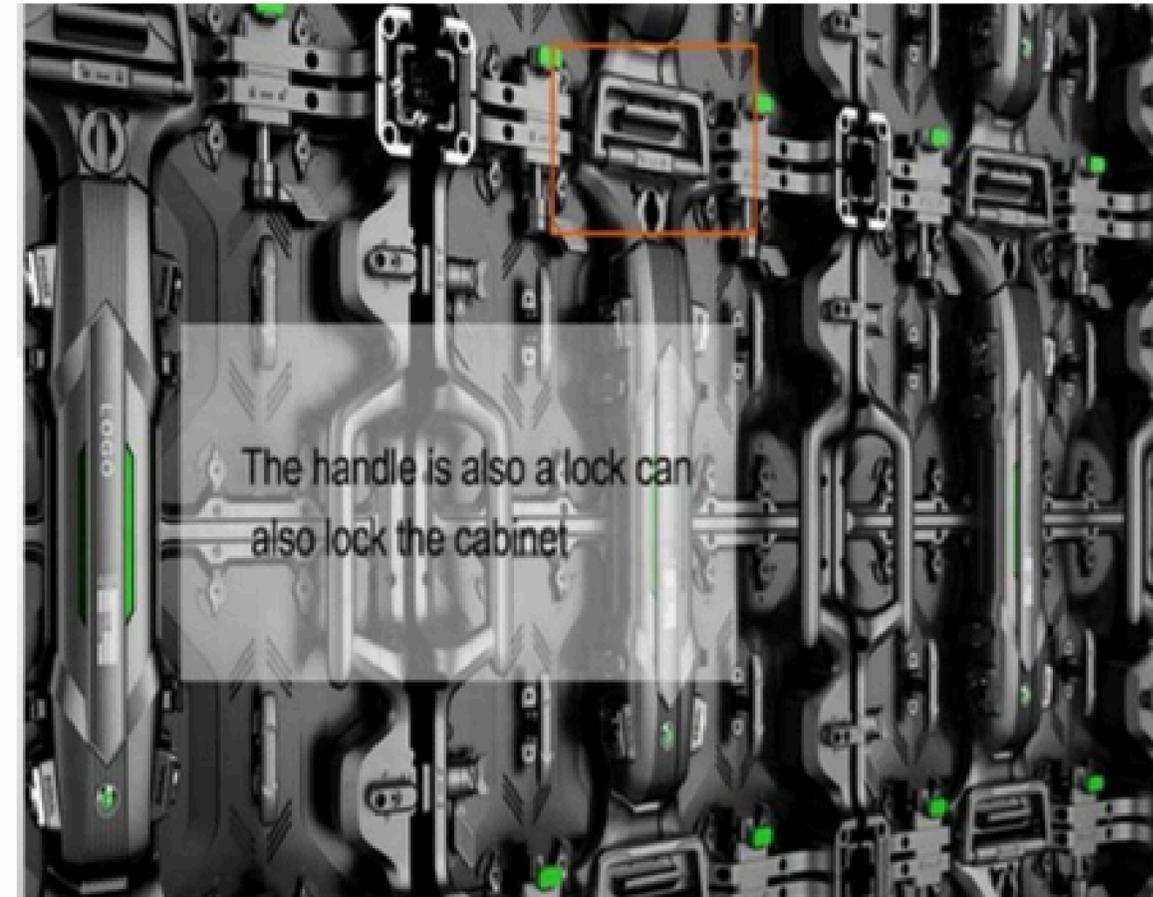

Curve Lock inner+5degrees/Outer-5degrees

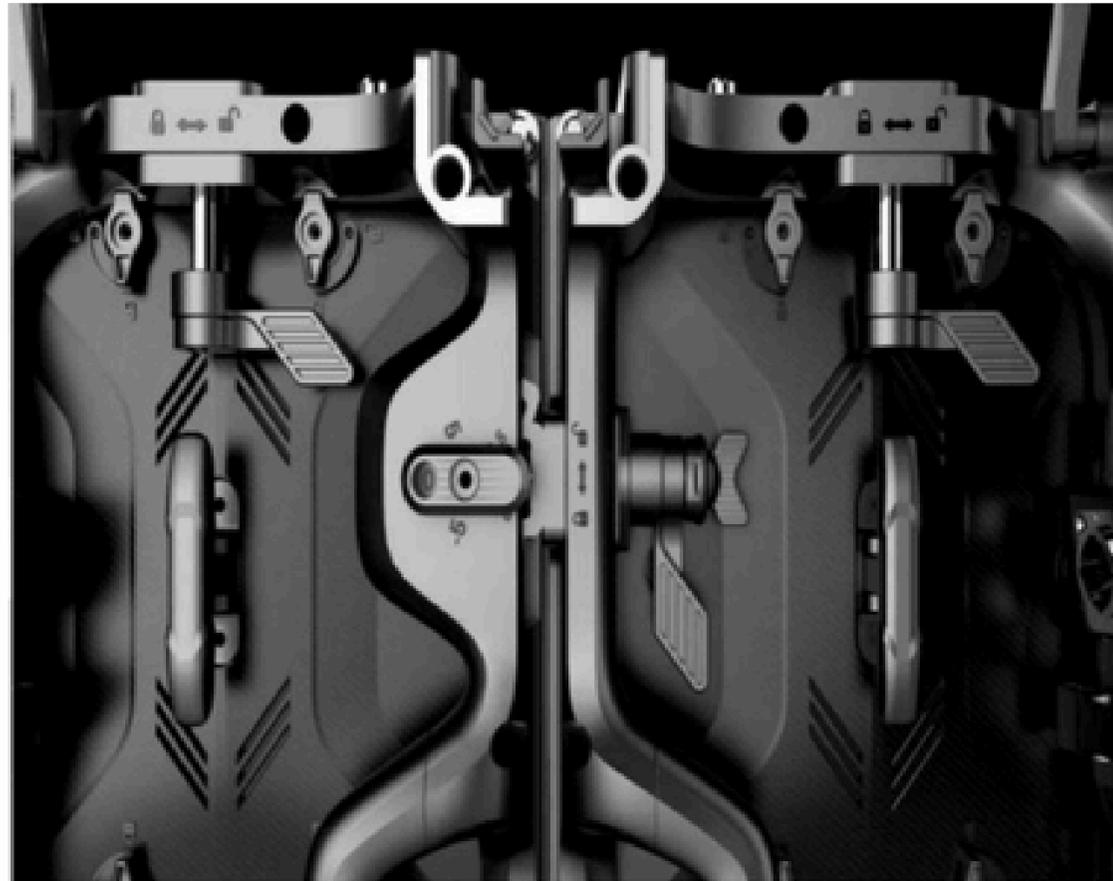

Each half cabinet can be locked from up and down, or left and right. Customised LED display shape easily joint.

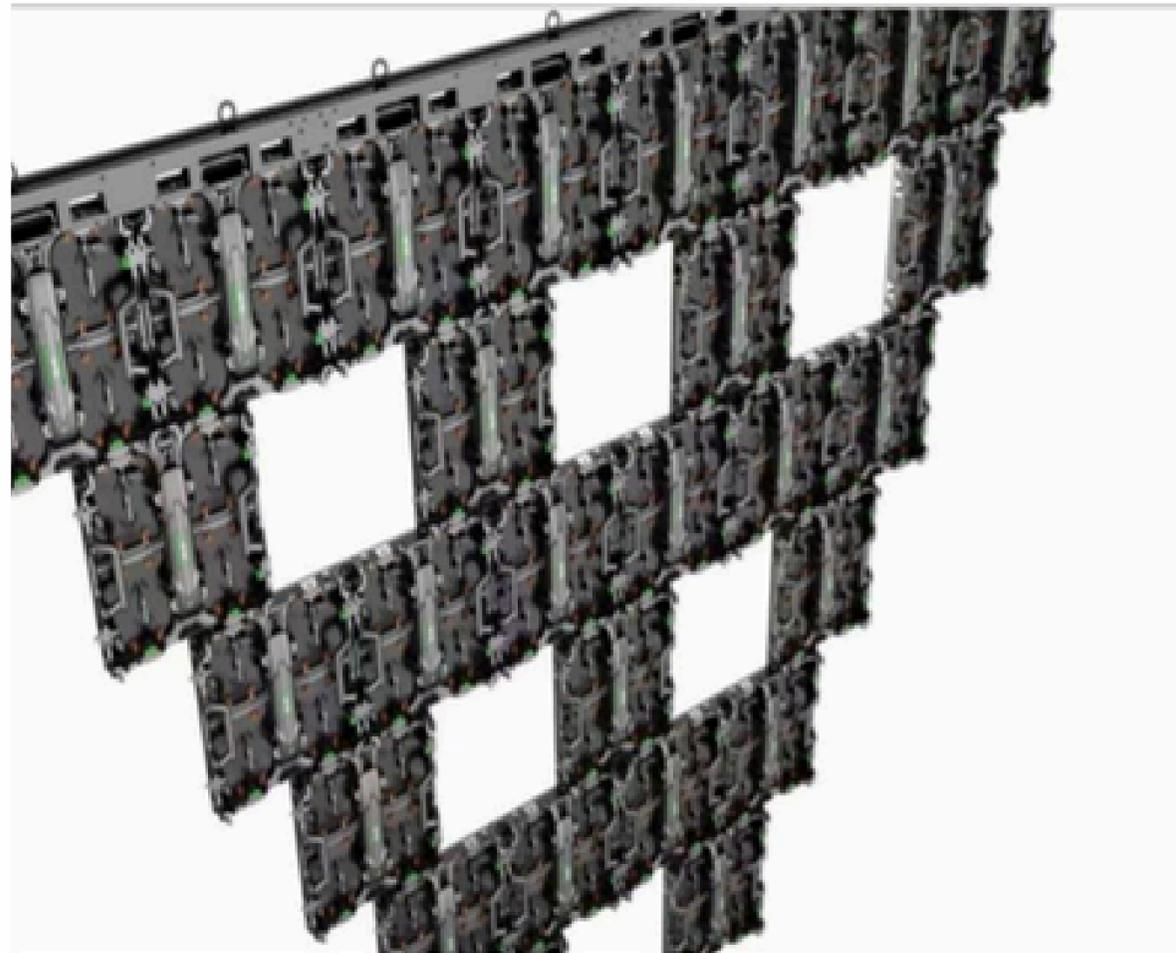

Installation Way

Hanging installation and stacking installation.

Both way can install maximum 20pcs led panels in height.



Hanging installation




Stacking installation




Exhibition



Shopping mall

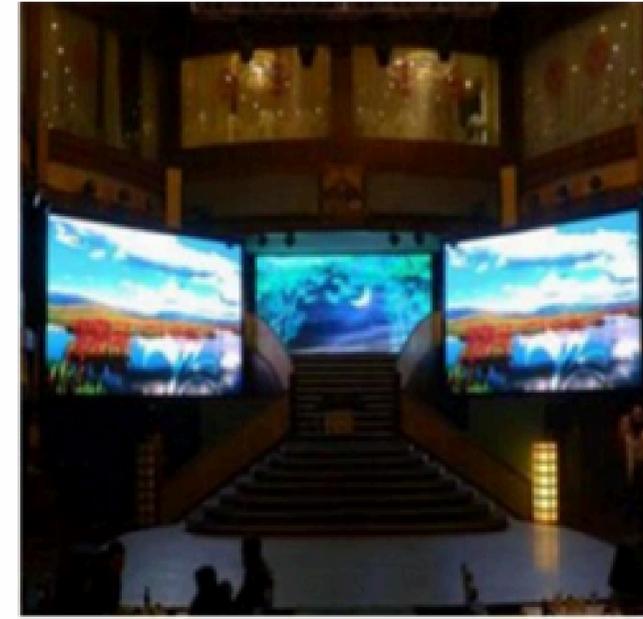

Hotel

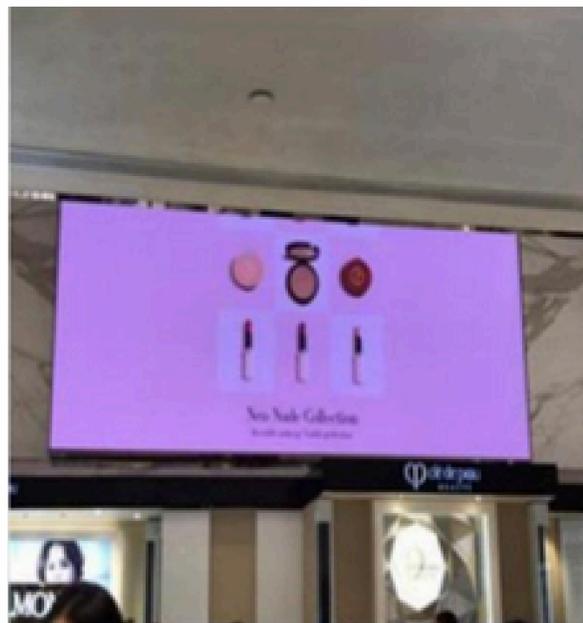

Duty Free Store



TV Studio



Stage

K Series Indoor LED Display

Model	K SeriesP1.5625(XOB)	K SeriesP1.95(XOB)	K Series2.5	K SeriesP2.604	K SeriesP2.976	K SeriesP3.91
Pixel Pitch	1.5625mm	1.95mm	2.5mm	2.604mm	2.976mm	3.91mm
LED Package	SMD1212	SMD1515	SMD2121/2020	SMD2121/2020	SMD1515	SMD2020
Pixel Density(dots/m ²)	409600	262144	160000	147456	112896	65536
Cabinet Resolution	320 × 320	256 × 256	200 × 200	192 × 192	168 × 168	128 × 128
Cabinet Weight(KG)	12	12	12.5	12.5	12	12
Drive Mode	1/32	1/32	1/32	1/32	1/21	1/16
View Angle	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°
Refresh Rate	≥ 3840hz	≥ 3840hz	≥ 3840hz	≥ 3840hz	≥ 3840hz	≥ 3840hz
IC	MBI5153	MBI5153	ICN2153	ICN2153	ICN2153	ICN2153
Brightness	700-1200cd/m ²					
Power Consumption (/m ²)	650W/260W					
IP Rating	IP30					
Cabinet Size	500mm × 500mm					
Gray Level	14-16bit					
Input Voltage	AC220V/50Hz					
Life Span	≥ 100000H					
Working	-20°C ~ +45°C					

K Series Outdoor LED Display

Model	K SeriesP2.976(XOB)	K SeriesP3.91	K SeriesP4.81	K SeriesP5.95
Pixel Pitch	2.976mm	3.91mm	4.81mm	5.95mm
LED Package	SMD1921	SMD1921	SMD1921	SMD2727
Pixel Density(dots/m ²)	112896	65536 dots/m ²	43264 dots/m ²	28224
Cabinet Resolution	168 × 168	128 × 128	104 × 104	42 × 42
Cabinet Weight(KG)	13.5	12.5KG	12.5KG	12.5
Drive Mode	1/21	1/16	1/13	1/7
View Angle	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°	H:140°, V:120°
Refresh Rate	≥ 3840hz	≥ 3840hz	≥ 3840hz	≥ 3840hz
IC	ICN2153	ICN2153	ICN2153	ICN2153
Brightness(cd/m ²)	4600	4500	4800	5500
Power Consumption (/m ²)	800W/350W			
IP Rating	IP54 IP65			
Cabinet Size	500mm × 1000mm			
Gray Level	14-16bit			
Input Voltage	AC220V/50Hz			
Life Span	≥ 100000H			
Working Temperature	-20°C ~ +45°C			
Working Humidity	10% ~ 60%RH			